




# Ritterbusch MediaTOP 25

## Conference-Room-System

The dedicated fullrange-system with two 5,25-inch transducer and an 1-inch tweeter on an conical wave guide in a vented trapezoid enclosure.  
Available in a portable version with 2 integrated M10 mounting/suspension points.

Options:  
Swivel Bracket  
Wall Bracket

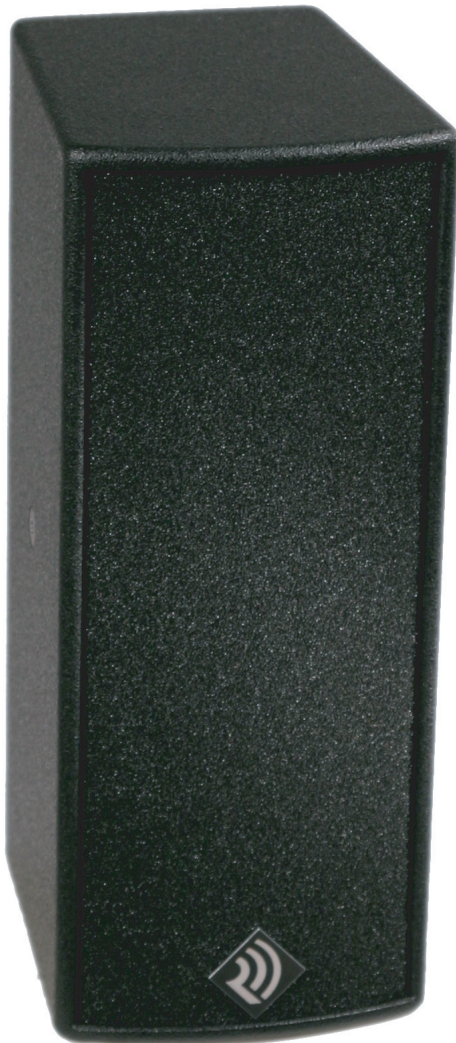

Frequency Response -6dB -10dB (f <sub>b</sub> )	65 Hz – 18 kHz 55 Hz – 20 kHz
Sensitivity (dB SPL, 1 Watt @1m)	90 dB
Impedance	4 Ohm
Power Handling (AES Standard)	90 Watt
Calculated Maximum Output (dB SPL @1m)	112 peak / 109 long term
Nominal Coverage Angles horizontal vertical	90° 60°
Dimensions Height Width Depth	32,0 cm 18,6 cm front, 15,8 cm rear 23,2 cm
Weight	6,5 kg
Additional Data	
Connectors	2 Terminal Barrier Strip
Enclosure	11 ply birch plywood
Finish	Textured black paint 2k
Grill	Vinyl coated steel, black
Acoustic Front Foam	Black
portable version:	2x M10 mounting points